


#### **GENERAL SPECIFICATIONS**

- Capacity : 40 Ton
- Composite body
- Dual Independant rear jack legs + removable spades
- Dual control
- 134 CuFt of tool box storage
- Minimum CA (from cab to center of rearmost axle): 180"
- Sandblast + epoxy primer
- Federal standard #108 light group
- LED lights
- Body reinforced with Kevlar where needed
- Steel inserts in bottom of body
- Pannic button
- Electric switches with rear controls
- 10 marker lights per side
- 2 Curb lights on each side
- Door checks
- Mud flaps
- Chain Rack
- Fork holders
- Air & Electrical hookupsHydraulic pressure gauges
- Direct mount 17 GPM Tandem hydraulic pump
- Working hydraulic pressure 2800-3000 PSI
- Slider cylinder stroke : 99"

#### CALL FOR YOUR NEAREST DISTRIBUTOR

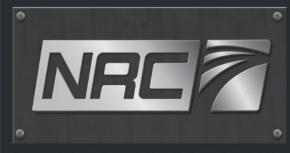

All recommendations are minimums, heavier specifications may be required, always consult your local distributor or the factory for more information.

All ratings are based on structural factors only, not vehicle capacities. Specifications shown are approximations and may vary depending on chassis selected. *NRC industries Inc.* Reserves the right to change or modify product and or specifications without notice or obligation. Some optional equipment shown.

Tel.: 450 379-5796 / Fax: 450 379-5995 / www.nrc-industries.com

#### **BOOM SPECIFICATIONS**

- Two stage boom
- Three stage boom
- "V" shape boom
- Boom structural rating fully retracted 30°
- Boom structural rating fully extended 30° (2 stage)
- Boom structural rating fully extended 30° (3 stage)
- Reach past tailgate (2 stage boom)
- Reach past tailgate (3 stage boom)
- Maximum hook height (2 stage)
- Maximum hook height (3 stage)
- Boom range of elevation
- 360° sheave head

#### WINCHES & STEEL WIRE ROPE

- Winch capacity (each)
- Winch type
- Wire rope
- 2 Planetary 15,000 lb Auxiliary winches
- Cable Air tensioners
- Air free spools

## AXLE-LIFT

#### Heavy duty

- Structural rating fully retracted
- Structural rating fully extended

### Super Heavy duty

- Structural rating fully retracted
- Structural rating fully extended

#### 50,000 lb 20,000 lb

16.000 lb

18.000 lb

40,000 lb

46,000 lb

3,000,000 in/lb

35.000 lb

15.000 lb

Standard

Standard

80,000 lb

30,000 lb

15,000 lb

194"

287"

321"

402"

40,000 lb

planetary

Option

3/4" x 200'

60°

Option

#### CHASSIS SPECIFICATIONS

- Front axle (minimum)
- Front axle (recommanded)
- Rear axles (minimum)
- Rear axles (recommanded)
- Double Frame
- RBM (minimum)

#### **OPTIONAL EQUIPMENT**

- Tunnel tool box (24" to 72")
- Light pylon
- Winch covers
- Adjustable aluminum shelves
- Forks
- Light bar
- Corner strobes
- Side Worklights
- Installation
- Accessories
- Paint
- Other options available



40 CS THE REVOLUTIONIZED SLIDER

REALIZE YORKITY



Once again, NRC has innovated and is offering you equipment that is more resistant, more powerful and easier to operate.

Completely revolutionizing the industry, the 40 CS (Composite Slider) is the first in its category to be comprised of a 100% composite body. This material is 4 times lighter than steel, offers more strength and more flexibility.

# REALIZE YOUR CAPACITY

The 40 CS boasts of more storage space with an incredible 134 cubic feet, featuring wide access on both sides of the equipment. Its innovative design produces an even greater lifting capacity, adapting to any situation.

As with all NRC products, your equipment can be personalized with the countless options that only NRC can offer you. It is heavy-duty, designed especially for you, and rises to meet the needs of even the most demanding Towing & Recovery professionals.


Now you can attain your fullest capacity with the incredible 40 CS!






- Easy access to your tools and equipments
- ── 134 cubic feet of storage space
- ── No more scratches on the bottom portion of the body
- ── Easy to customize



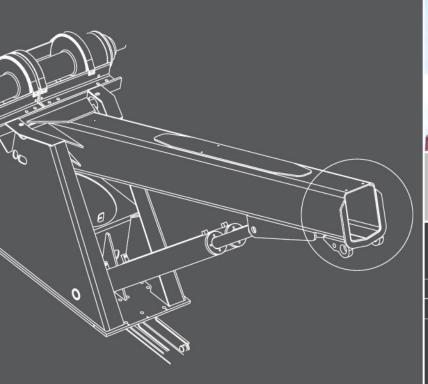





V BOOM

- ── Made from hi-tensile steel
- ── Its amazing design provides you with incredible strength ─☐ Its strength provides safer working conditions







# COMPOSITE BODY

- ── The NRC slider with a complete composite body
- ── Incrustated Kevlar provides the industry's most solid equipment
- —
   Rust free ─□ Includes safety features such as a "panic button" and dual control panel









# SLIDER TECHNOLOGY

- —— Double your lifting capacity by working with the boom in its retracted position
- ─ Reduce stress on the body and frame rails by sliding the mast right over the jack legs
- ─□ Increase your reach by 99" to handle jobs that would otherwise be impossible to reach without the slider technology
- ─ Save time and money by being able to move your load back and forth without having to change the hook height
- ─ Maintain the casualty at a safe distance from yourself and your equipment ─ Work more safely with a higher level of performance



- □ Lighter than an independent or integrated under reach
- No sacrifice on recovery jobs as the under reach may be detached from the boom, allowing
  - unhindered work
- Detachable from the boom in seconds
- Get closer to the tailboard for extreme recoveries
- Improve safety by using the standard wireless remote control



